
## **TECHNICAL DATA SHEET**






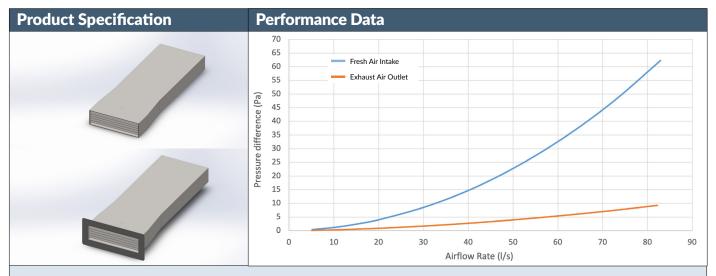

- Single Air Brick and Duct Transition Kit with or without picture frame
- A1 Non Combustible product classification (ES EN 13501w+A1:2018)
- 600mm Ducting Transition

- RAL Powder Coating Finish to AS-s1,d
- Unique mechanical fixing
- Female connector for easy transition to internal ducting

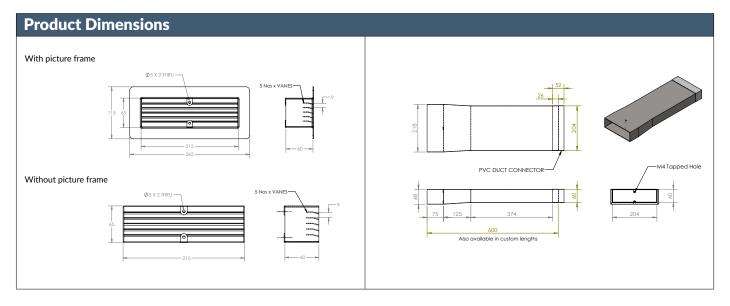

Product Range Info											
Product	Description	<b>Duct Connection</b>	Classification	Weight (kg)	Free Area mm²	Part Code	Colour Options				
ResiBRICK Single	ResiBRICK Single Kit 204x60mm	204 x 60mm	A1 and A2-s1,d0	0.64	11,610	RB-SIN-204/600- COLOUR CODE	COT - Cotswold RAL 1014 TER - Teracotta RAL 8004 BRW - Brown				
ResiBRICK Single	ResiBRICK Single Kit 204x60mm with picture frame	204 x 60mm	A1 and A2-s1,d0	0.7	11,610	RB-SINPF- 204/600-COLOUR CODE	RAL 8011 WHI - Traffc White RAL 9016 BLL - Black RAL 9010				

Downloadable files available at www.pinnaclehvacsolutions.co.uk - BIM, CAD, Consultant Specification, Brochure & Install Best Practice Performance independently tested by BRE

## **TECHNICAL DATA SHEET**


## ResiBRICK<sup>A1</sup> Single - 125mm





- Single Air Brick and Duct Transition Kit with or without picture frame
- A1 Non Combustible product classification (ES EN 13501w+A1:2018)
- 600mm Ducting Transition

- RAL Powder Coating Finish to AS-s1,d
- Unique mechanical fixing
- Female connector for easy transition to internal ducting

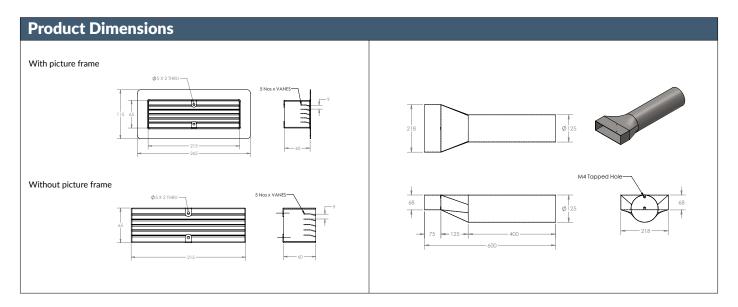

Product Range Info											
Product	Description	<b>Duct Connection</b>	Classification	Weight (kg)	Free Area mm²	Part Code	Colour Options				
ResiBRICK Single	ResiBRICK Single Kit 125mm	125mm	A1 and A2-s1,d0	0.64	11,610	RB-SIN-125/600- COLOUR CODE	COT - Cotswold RAL 1014 TER - Teracotta RAL 8004 BRW - Brown				
ResiBRICK Single	ResiBRICK Single Kit 125mm with picture frame	125mm	A1 and A2-s1,d0	0.7	11,610	RB-SINPF- 125/600-COLOUR CODE	RAL 8011 WHI - Traffc White RAL 9016 BLL - Black RAL 9010				

Downloadable files available at www.pinnaclehvacsolutions.co.uk – BIM, CAD, Consultant Specification, Brochure & Install Best Practice Performance independently tested by BRE