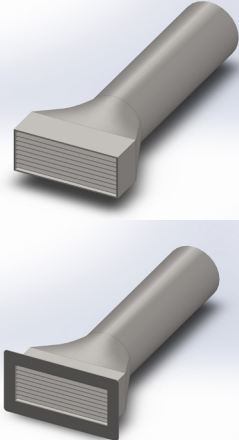
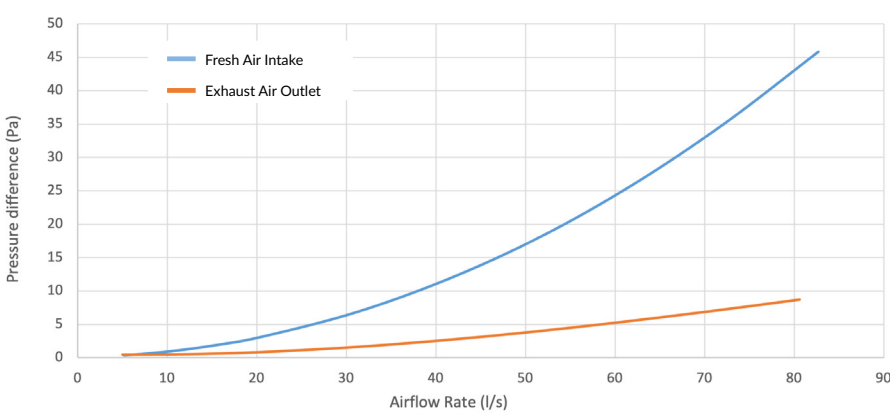
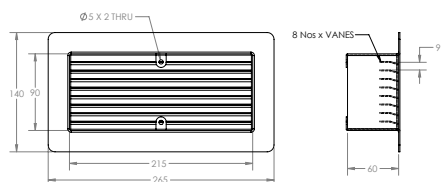
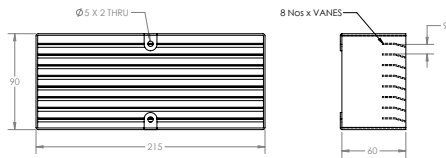
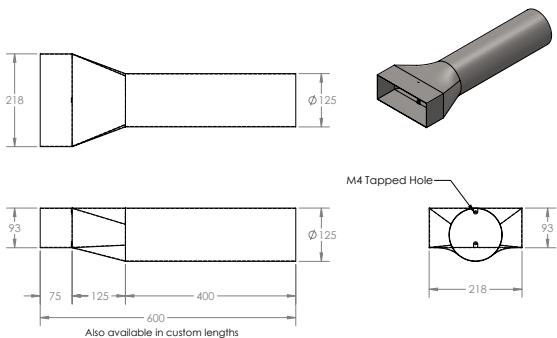
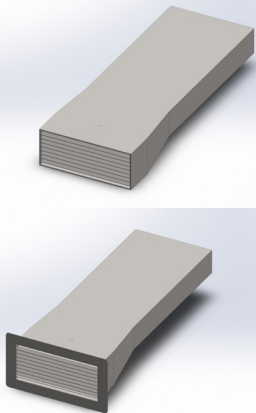
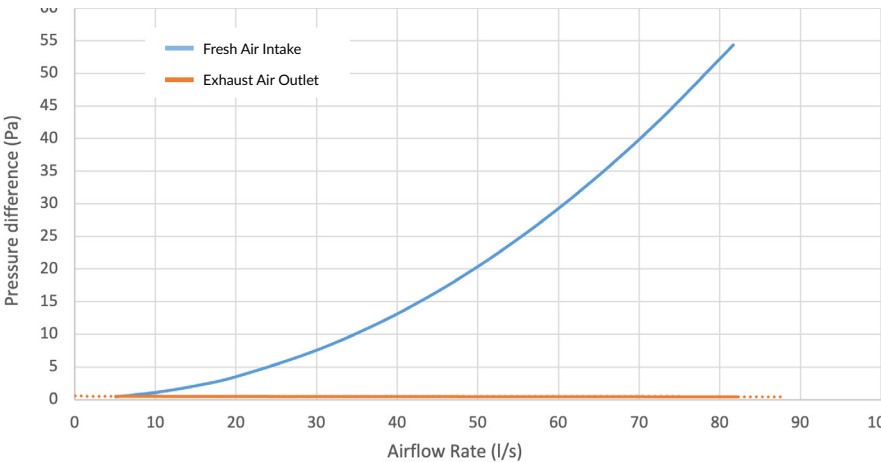


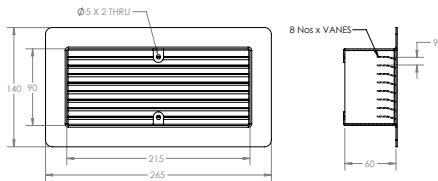
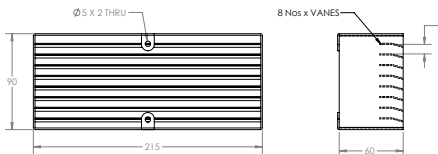
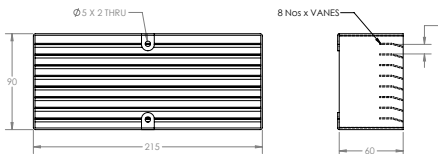
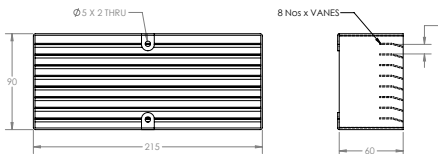
| Product Specification                                                                                                                                                                                                                | Performance Data                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                     |                                                                                                          |
| <ul style="list-style-type: none"> <li>Single Air Brick and Duct Transition Kit with or without picture frame</li> <li>A1 Non Combustible product classification (ES EN 13501w+A1:2018)</li> <li>600mm Ducting Transition</li> </ul> | <ul style="list-style-type: none"> <li>RAL Powder Coating Finish to AS-s1,d</li> <li>Unique mechanical fixing</li> <li>Female connector for easy transition to internal ducting</li> </ul> |

| Product Dimensions                                                                                                                                                                                                             |                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <p>With picture frame</p>  <p>Without picture frame</p>  |  |

| Product Range Info  |                                                  |                 |                 |             |                           |                                |                                                                                      |
|---------------------|--------------------------------------------------|-----------------|-----------------|-------------|---------------------------|--------------------------------|--------------------------------------------------------------------------------------|
| Product             | Description                                      | Duct Connection | Classification  | Weight (kg) | Free Area mm <sup>2</sup> | Part Code                      | Colour Options                                                                       |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 125mm                    | 125mm           | A1 and A2-s1,d0 | 0.839       | 17,415                    | RB-SINXL-125/600-COLOUR CODE   | COT - Cotswold<br>RAL 1014<br>TER - Teracotta<br>RAL 8004<br>BRW - Brown<br>RAL 8011 |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 125mm with picture frame | 125mm           | A1 and A2-s1,d0 | 0.914       | 17,415                    | RB-SINXLPF-125/600-COLOUR CODE | WHI - Traffic White<br>RAL 9016<br>BLK - Black<br>RAL 9010                           |

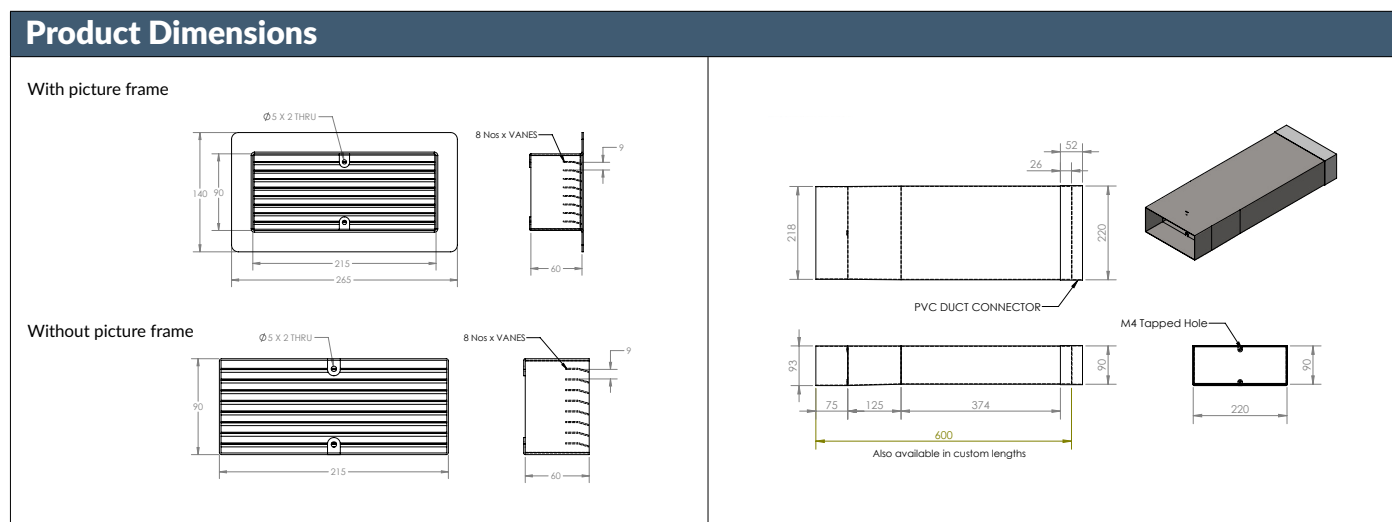
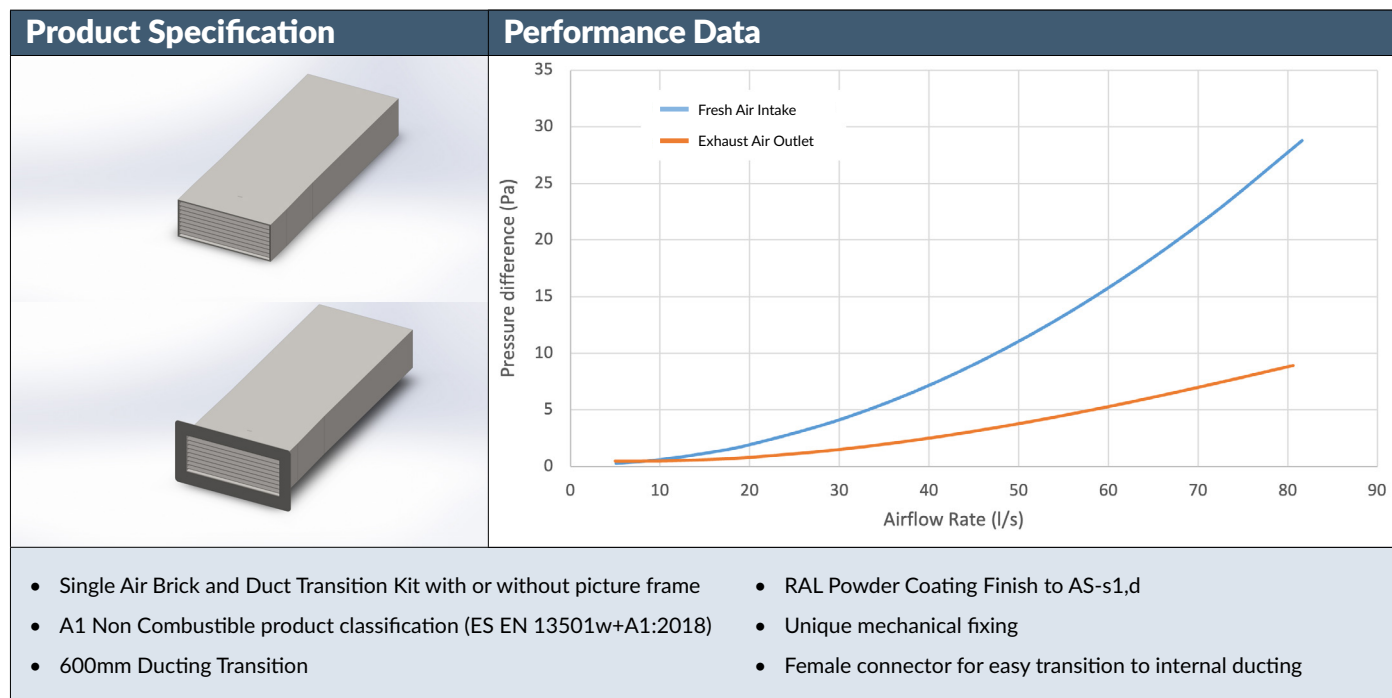
Downloadable files available at [www.pinnaclehvacsolutions.co.uk](http://www.pinnaclehvacsolutions.co.uk) – BIM, CAD, Consultant Specification, Brochure & Install Best Practice  
Performance independently tested by BRE

| Product Specification                                                                                                                                                                                                                | Performance Data                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                     |                                                                                                          |
| <ul style="list-style-type: none"> <li>Single Air Brick and Duct Transition Kit with or without picture frame</li> <li>A1 Non Combustible product classification (ES EN 13501w+A1:2018)</li> <li>600mm Ducting Transition</li> </ul> | <ul style="list-style-type: none"> <li>RAL Powder Coating Finish to AS-s1,d</li> <li>Unique mechanical fixing</li> <li>Female connector for easy transition to internal ducting</li> </ul> |

| Product Dimensions                                                                                               |                                                                                     |
|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <p>With picture frame</p>     |  |
| <p>Without picture frame</p>  |  |

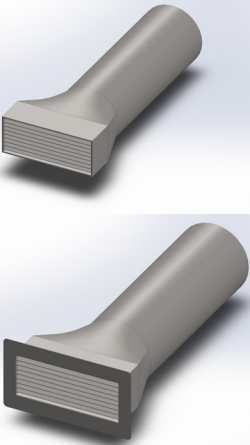
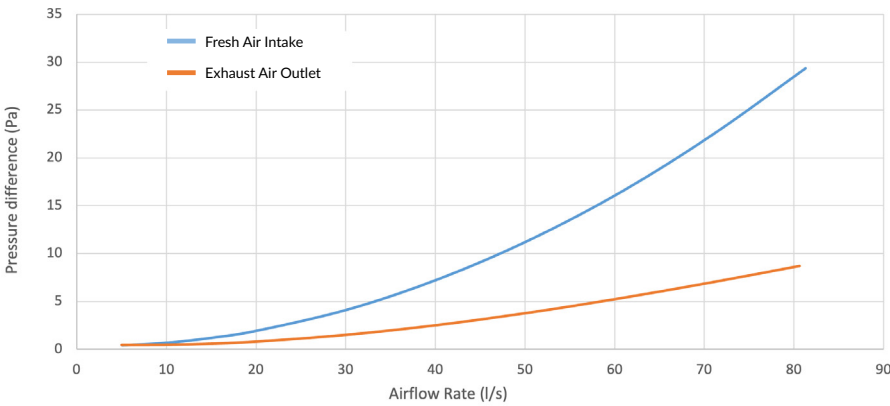
| Product Range Info  |                                                     |                 |                 |             |                           |                                |                                                                                      |
|---------------------|-----------------------------------------------------|-----------------|-----------------|-------------|---------------------------|--------------------------------|--------------------------------------------------------------------------------------|
| Product             | Description                                         | Duct Connection | Classification  | Weight (kg) | Free Area mm <sup>2</sup> | Part Code                      | Colour Options                                                                       |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 204x60mm                    | 204x60mm        | A1 and A2-s1,d0 | 0.839       | 17,415                    | RB-SINXL-204/600-COLOUR CODE   | COT - Cotswold<br>RAL 1014<br>TER - Teracotta<br>RAL 8004<br>BRW - Brown<br>RAL 8011 |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 204x60mm with picture frame | 204x60mm        | A1 and A2-s1,d0 | 0.914       | 17,415                    | RB-SINXLPF-204/600-COLOUR CODE | WHI - Traffic White<br>RAL 9016<br>BLK - Black<br>RAL 9010                           |

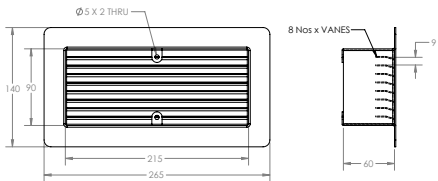
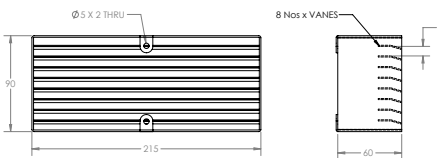
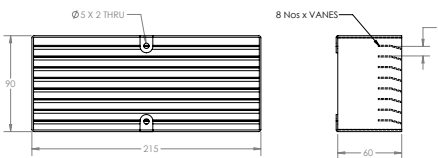
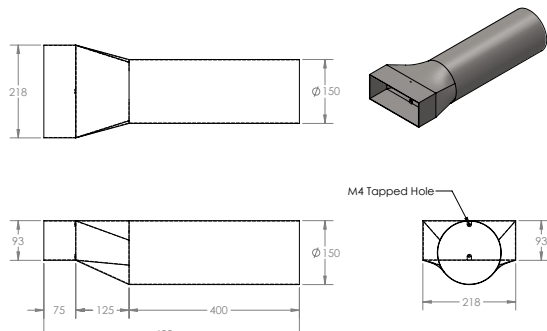
Downloadable files available at [www.pinnaclehvacsolutions.co.uk](http://www.pinnaclehvacsolutions.co.uk) – BIM, CAD, Consultant Specification, Brochure & Install Best Practice  
Performance independently tested by BRE



| Product Range Info  |                                                     |                 |                 |             |                           |                              |                                                                                      |
|---------------------|-----------------------------------------------------|-----------------|-----------------|-------------|---------------------------|------------------------------|--------------------------------------------------------------------------------------|
| Product             | Description                                         | Duct Connection | Classification  | Weight (kg) | Free Area mm <sup>2</sup> | Part Code                    | Colour Options                                                                       |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 220x90mm                    | 220x90mm        | A1 and A2-s1,d0 | 0.839       | 17,415                    | RB-SINXL-220/600-COLOUR CODE | COT - Cotswold<br>RAL 1014<br>TER - Teracotta<br>RAL 8004<br>BRW - Brown<br>RAL 8011 |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 220x90mm with picture frame | 220x90mm        | A1 and A2-s1,d0 | 0.914       | 17,415                    | RB-SINXL-220/600-COLOUR CODE | WHI - Traffic White<br>RAL 9016<br>BLK - Black<br>RAL 9010                           |

Downloadable files available at [www.pinnaclehvacsolutions.co.uk](http://www.pinnaclehvacsolutions.co.uk) – BIM, CAD, Consultant Specification, Brochure & Install Best Practice  
Performance independently tested by BRE

| Product Specification                                                                                                                                                                                                                | Performance Data                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                     |                                                                                                          |
| <ul style="list-style-type: none"> <li>Single Air Brick and Duct Transition Kit with or without picture frame</li> <li>A1 Non Combustible product classification (ES EN 13501w+A1:2018)</li> <li>600mm Ducting Transition</li> </ul> | <ul style="list-style-type: none"> <li>RAL Powder Coating Finish to AS-s1,d</li> <li>Unique mechanical fixing</li> <li>Female connector for easy transition to internal ducting</li> </ul> |

| Product Dimensions                                                                                               |                                                                                      |
|------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <p>With picture frame</p>     |   |
| <p>Without picture frame</p>  |  |

| Product Range Info  |                                                  |                 |                 |             |                           |                                |                                                                                      |
|---------------------|--------------------------------------------------|-----------------|-----------------|-------------|---------------------------|--------------------------------|--------------------------------------------------------------------------------------|
| Product             | Description                                      | Duct Connection | Classification  | Weight (kg) | Free Area mm <sup>2</sup> | Part Code                      | Colour Options                                                                       |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 150mm                    | 150mm           | A1 and A2-s1,d0 | 0.839       | 17,415                    | RB-SINXL-150/600-COLOUR CODE   | COT - Cotswold<br>RAL 1014<br>TER - Teracotta<br>RAL 8004<br>BRW - Brown<br>RAL 8011 |
| ResiBRICK Single XL | ResiBRICK Single XL Kit 150mm with picture frame | 150mm           | A1 and A2-s1,d0 | 0.914       | 17,415                    | RB-SINXLPF-150/600-COLOUR CODE | WHI - Traffic White<br>RAL 9016<br>BLK - Black<br>RAL 9010                           |

Downloadable files available at [www.pinnaclehvacsolutions.co.uk](http://www.pinnaclehvacsolutions.co.uk) – BIM, CAD, Consultant Specification, Brochure & Install Best Practice  
Performance independently tested by BRE